

TECHNICAL DETAILS

Material	: Polyamide PA6 V2
Connection thread	: Metric (EN60423)/ PG (DIN40430)
Color	: Grey (RAL7031) Black (RAL9005)
Temperature range	: -30 °C +80 °C

Properties

UV resistance (black)


Easy to assemble

Halogen free

Apply with either plastic or metal conduits

CONDUIT GLANDS

FOR PVC SPIRAL

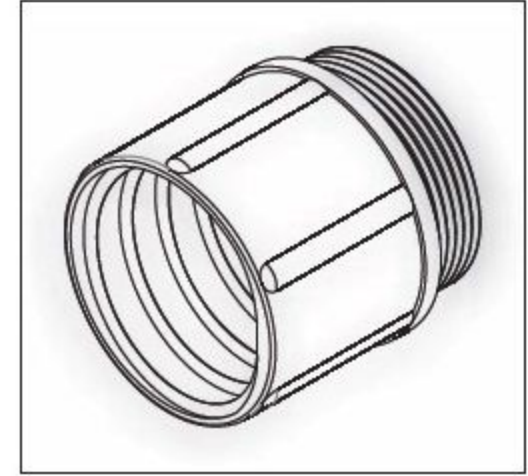

PVC SİRAL BORU RAKORLARI

Hammaddesi	: Polyamid
Renk	: RAL 7001 (Gri) RAL 7035 (A. Gri) RAL 9005 (Siyah)
Bağlantı dişi M	EN 60423
Bağlantı dişi PG	DIN 40430
Çalışma sıcaklığı	-30 °C + 80 °C
Kısa süreli ısıya direnci	+150 °C




■ RAL 7001



■ RAL 7035



■ RAL 9005

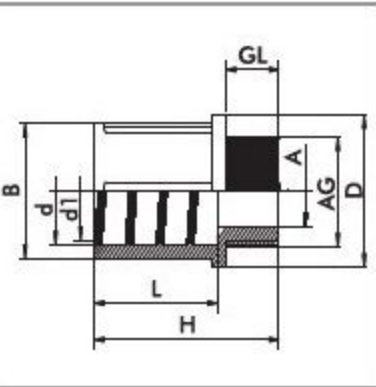

AG Thread	Gray Code ■ RAL 7001	L. Gray Code ■ RAL 7035	Black Code ■ RAL 9005	A mm.	B mm.	D mm.	GL mm.	H mm.	L mm.	d mm.	d1 mm.
PG 7	OHG 01	OHL 01	OHB 01	7	16	17,5	8	29	20	13,3	11,6
PG 9	OHG 02	OHL 02	OHB 02	10	19	20	8	29	20	15,8	13,6
PG 11	OHG 03	OHL 03	OHB 03	13,5	22,5	24	8	32	23	20	17,7
PG 13,5	OHG 04	OHL 04	OHB 04	14	24,5	26	9	34	24	21,8	18,8
PG 16	OHG 05	OHL 05	OHB 05	16	26	27,5	10	35	24	23,5	20,7
PG 21	OHG 06	OHL 06	OHB 06	19	32	33,5	11	38	25,5	29,2	26,5
PG 29	OHG 07	OHL 07	OHB07	31,6	41	42	11	43	30,5	38	34,7
PG 36	OHG 08	OHL 08	OHB 08	40,8	51,8	53	14	54	33	47,6	42,9
PG 48	OHG 09	OHL 09	OHB 09	51	62	64	14	57	37	57,7	53,3