

AUS, Copper Crimp Lug to DIN


- Clear markings on barrel to indicate correct crimping location

- In accordance with DIN 46235

Material: Cu ≥ 99.9%

Surface: electro tin plated

Application: medium voltage

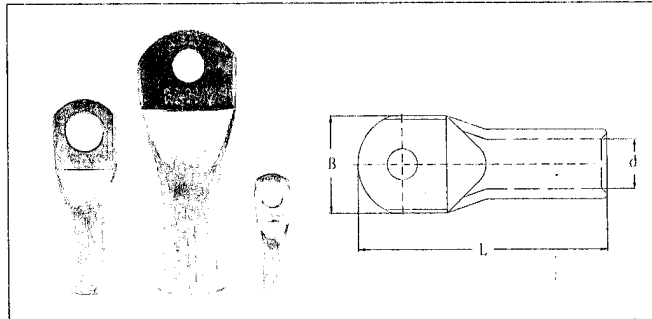

Type	Conductor Size (mm ²)	Dimension			Stud Size	Pack(pcs)	Weight (Kg) 100pcs	Crimping Die
		L(mm)	d(mm)	B(mm)				
AUS6-5	6	33	3.8	8.5	M5	2,000	0.27	DT5
AUS6-6		34.5	3.8	9	M6		0.26	
AUS6-8		37	3.8	13	M8		0.28	
AUS10-5	10	36	4.5	9	M5	1,500	0.32	DT6
AUS10-6		37.5	4.5	9	M6		0.34	
AUS10-8		40	4.5	13	M8		0.33	
AUS16-6	16	46.5	5.5	13	M6	500	1.11	DT8
AUS16-8		49	5.5	13	M8		1.20	
AUS16-10		51	5.5	17	M10		1.17	
AUS25-6	25	48.5	7	14	M6	400	1.42	DT10
AUS25-8		51	7	16	M8		1.50	
AUS25-10		53	7	17	M10		1.50	
AUS25-12		54	7	19	M12		1.46	
AUS35-6	35	52.5	8.2	17	M6	200	2.81	DT12
AUS35-8		55	8.2	17	M8		2.84	
AUS35-10		57	8.2	19	M10		2.84	
AUS35-12		58	8.2	21	M12		2.81	
AUS50-8	50	65	10	20	M8	150	4.20	DT14
AUS50-10		67	10	22	M10		4.25	
AUS50-12		68	10	24	M12		4.43	
AUS50-16		71	10	28	M16		4.19	
AUS70-8	70	68	11.5	24	M8	100	5.73	DT16
AUS70-10		70	11.5	24	M10		5.86	
AUS70-12		71	11.5	24	M12		5.68	
AUS70-14		72.5	11.5	24	M14		5.43	
AUS70-16		74	11.5	30	M16		6.08	