


**W-Series  
WDU 2.5 OR**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

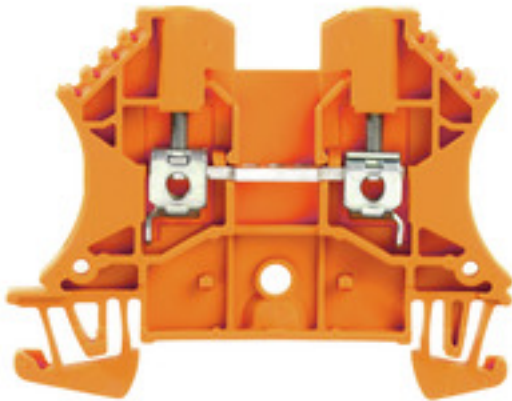

**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

**General ordering data**

|            |   |
|------------|---|
| Type       | WDU 2.5 OR  |
| Order No.  | <a href="#">1020060000</a>  |
| Version    | Feed-through terminal, Screw connection, 2.5 mm², 800 V, 24 A, Orange |
| GTIN (EAN) | 4008190012809   |
| Qty.       | 100 pc(s).  |

**W-Series**  
**WDU 2.5 OR**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

|        |         |                 |            |
|--------|---------|-----------------|------------|
| Width  | 5.1 mm  | Width (inches)  | 0.201 inch |
| Height | 60 mm   | Height (inches) | 2.362 inch |
| Depth  | 46.5 mm | Depth (inches)  | 1.831 inch |
| Weight | 8.62 g  | Net weight      | 7.49 g     |

**Temperatures**

|                                  |        |                                  |        |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |
|----------------------------------|--------|----------------------------------|--------|

**Material data**

|                           |       |        |        |
|---------------------------|-------|--------|--------|
| Material                  | Wemid | Colour | Orange |
| UL 94 flammability rating | V-2   |        |        |

**Rating data IECEx/ATEX**

|                                |   |                                 |                     |
|--------------------------------|---|---------------------------------|---------------------|
| Certificate No. (ATEX)         | DEMKO14ATEX1338U  | Certificate No. (IECEX)         | IECEXULD14.0005U    |
| Max. voltage (ATEX)            | 690 V   | Current (ATEX)                  | 24 A                |
| Wire cross section max. (ATEX) | 2.5 mm <sup>2</sup>   | Max. voltage (IECEX)            | 690 V               |
| Current (IECEX)                | 24 A  | Wire cross section max. (IECEX) | 2.5 mm <sup>2</sup> |
| Operating temperature range    | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7              | Ex e II             |
| Ex 2014/34/EU label            | II 2 G D  |                                 |                     |

**System specifications**

|  |  |   |        |
|--|--|---|--------|
| Version  | Screw connection, for plug-in cross-connector, for screwable cross-connection, One end without connector | Tightening torque (clamping screw for aluminium conductors) | 0.4 Nm |
| Tightening torque (clamping screw for copper conductors) | 0.4...0.8 Nm   | End cover plate required                                    | Yes    |
| Number of potentials                                     | 1  | Number of levels  | 1      |
| No. of clamping points per level                         | 2  | Number of potentials per tier                               | 1      |
| Levels cross-connected internally                        | No   | PE connection   | No     |
| Mounting rail  | TS 35  | N-function  | No     |
| PE function  | No   | PEN function  | No     |

**Additional technical data**

|                          |       |                             |         |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | Yes   | Number of similar terminals | 1       |
| Open sides               | right | Type of mounting            | Snap-on |

**CSA rating data**

|                               |                |                               |        |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-1057876 | Current size C (CSA)          | 20 A   |
| Voltage size C (CSA)          | 600 V          | Wire cross section max. (CSA) | 12 AWG |
| Wire cross section min. (CSA) | 26 AWG         |                               |        |

## W-Series WDU 2.5 OR

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 2.5 mm<sup>2</sup>

### Conductors for clamping (rated connection)

|   |                      |   |                     |
|---|----------------------|---|---------------------|
| Clamping range, rated connection, min.  | 0.05 mm <sup>2</sup> | Clamping screw  | M 2.5               |
| Connection direction  | on side              | Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min. | 0.5 mm <sup>2</sup> |
| Number of connections   | 2                    | Torque level with DMS electric screwdriver  | 1                   |
| Twin wire-end ferrules, max.  | 1.5 mm <sup>2</sup>  | Twin wire-end ferrules, min.  | 0.5 mm <sup>2</sup> |
| Type of connection  | Screw connection     | Wire connection cross section AWG, max.   | AWG 12              |
| Wire connection cross section AWG, min.   | AWG 30               | Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.                             | 2.5 mm <sup>2</sup> |
| Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.                     | 0.5 mm <sup>2</sup>  | Wire connection cross section, finely stranded, max.  | 4 mm <sup>2</sup>   |
| Wire connection cross section, solid core max. rated connection   | 4 mm <sup>2</sup>    | Wire connection cross section, solid core, min. rated connection  | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max. | 2.5 mm <sup>2</sup>  | Wire connection cross-section, finely stranded, min.  | 0.5 mm <sup>2</sup> |

### Rating data

|                     |                     |  |         |
|---------------------|---------------------|--|---------|
| Rated cross-section | 2.5 mm <sup>2</sup> | Rated voltage                                | 800 V   |
| Rated current       | 24 A                | Volume resistance according to IEC 60947-7-x | 1.33 mΩ |

### UL rating data

|   |        |   |        |
|---|--------|---|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 12 AWG |
| Conductor size Factory wiring min. (UR) | 30 AWG | Conductor size Field wiring max. (UR)   | 12 AWG |
| Conductor size Field wiring min. (UR)   | 28 AWG | Current size B (UR)                     | 25 A   |
| Current size C (UR)                     | 25 A   | Voltage size B (UR)                     | 600 V  |
| Voltage size C (UR)                     | 600 V  |   |        |

### Classifications

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC000897    | ETIM 4.0   | EC000897    |
| ETIM 5.0   | EC000897    | ETIM 6.0   | EC000897    |
| UNSPSC     | 30-21-18-11 | eClass 5.1 | 27-14-11-20 |
| eClass 6.2 | 27-14-11-20 | eClass 7.1 | 27-14-11-20 |
| eClass 8.1 | 27-14-11-20 | eClass 9.0 | 27-14-11-20 |
| eClass 9.1 | 27-14-11-20 |            |             |

**Data sheet**

**W-Series  
WDU 2.5 OR**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Approvals**

Approvals



ROHS Conform

**Downloads**

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">CFAT_WDU 2.5.pdf</a><br><a href="#">IECEXULD14.0005U_e.pdf</a><br><a href="#">CB Test Zertifikat</a><br><a href="#">CB Zertifikat</a><br><a href="#">DE_PT1001_20160414_159_ISSUE01.pdf</a><br><a href="#">ACF-ATEX_4786180920</a> |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>   |
| User Documentation                          | <a href="#">NTI_IECEX_WDU-WPE 2.5.pdf</a>  |

**Safety note**

Safety notice [Safety Information](#)

**Data sheet**

**W-Series**  
**WDU 2.5 OR**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

